

- 99 dB SPL 1W/ 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 600W program power handling
- High force neodymium magnet assembly
- Weather protected cone for outdoor usage
- Ideal for compact reflex subwoofer and reflex multiway systems

The 15ND730 transducer has been designed to meet market demand for high output woofers, capable of providing deep bottom-end in bandpass, horns or small reflex enclosures. The level of distortion is kept very low within its application range.

The 15ND730 is suitable for high loading enclosures, such as subwoofers or 2-way system reflex enclosures when coupled with a 1.4" - 2" compression driver.

The neodymium magnet assembly developed by Eighteen Sound engineers assures high flux concentration, low power compression and excellent heat exchange, since the external magnet configuration is considerably more efficient than traditional under-pole magnet topology. This results in high levels of force factor and power handling with an optimum power to weight ratio.



A single demodulating ring, appropriately positioned in the magnetic circuit, allows a further flux modulation reduction, keeping overall distortions at a low level when driven hard.

The deep profile curvilinear cone, created from a special high strength wood pulp has been designed to achieve the best possible linearity within its frequency range. The cone surround, made from a linen material is highly resistant to aging and fatigue. The in-house developed cone treatment is fully water repellent and also gives a significant degree of rigidity to the cone.

The 75 mm Interleaved Sandwich Voice coil (ISV) assembly is wound on a strong fibreglas former which improves force transmission and thermal power handling.

The four threaded backplate holes allow the final user the possibility to insert an external-customized heatsink if further heat dissipation is required.

A special coating applied to both the top and back plates makes the 15ND730 far more resistant to the corrosive effects of salts and oxidization.

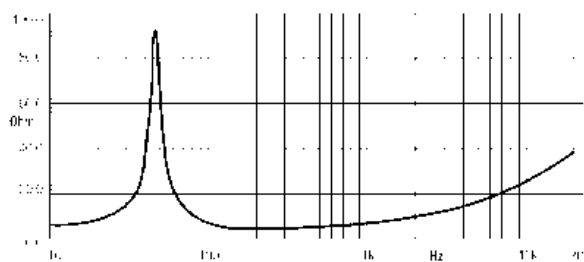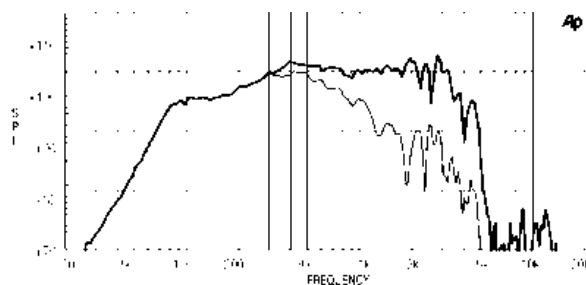

SPECIFICATIONS

| | |
|--|----------------|
| Nominal Diameter | 380 mm (in) |
| Nominal Impedance | 8 Ω |
| Nominal Power Handling ¹ | 400 W |
| Continuous Power Handling ² | 600 W |
| Sensitivity ³ | 99.0 dB |
| Frequency Range | 44 - 4000 Hz |
| Voice Coil Diameter | 75 mm (3.0 in) |

DESIGN

| | |
|------------------------|---|
| Surround Shape | Double roll |
| Cone Shape | Curvilinear |
| Magnet Material | Neo |
| Woofers Cone Treatment | Weather protected |
| Recommended Enclosure | 100.0 dm ³ (3.53 ft ³) |
| Recommended Tuning | 50 Hz |

PARAMETERS⁴

| | |
|---------------------|--|
| Resonance Frequency | 44 Hz |
| Re | 5.5 Ω |
| Qes | 0.3 |
| Qms | 8.1 |
| Qts | 0.29 |
| Vas | 156.0 dm ³ (5.51 ft ³) |
| Sd | 900.0 cm ² (139.5 in ²) |
| Xmax | 6.5 mm |
| Mms | 86.0 g |
| Bl | 21.0 Txm |
| Le | 1.35 mH |
| EBP | 146 Hz |

MOUNTING AND SHIPPING INFO

| | |
|-----------------------------|--------------------------------------|
| Overall Diameter | 387 mm (15.24 in) |
| Bolt Circle Diameter | 370 mm (14.57 in) |
| Baffle Cutout Diameter | 353.0 mm (13.9 in) |
| Depth | 169 mm (6.65 in) |
| Flange and Gasket Thickness | 11 mm (0.43 in) |
| Net Weight | 3.9 kg (8.6 lb) |
| Shipping Weight | 4.8 kg (lb) |
| Shipping Box | 405x405x214 mm (15.94x15.94x8.43 in) |

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.